





# N NETPROO®

BE ALERT, BE SAFE....



## PRODUCT CATALOGUE

- IP CAMERAS & NVRs
- AHD CAMERAS & DVRs
- CCTV CABLES & CAT-6
- CCTV POWER SUPPLY
- NETWORK POE SWITCHES

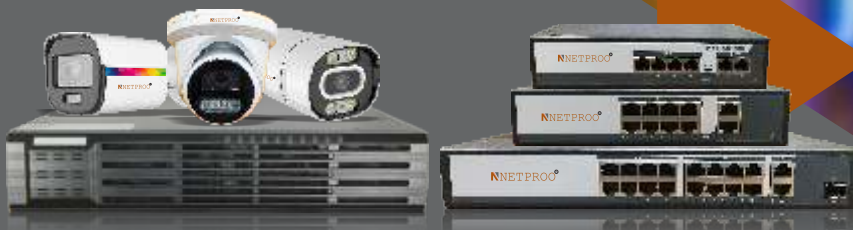

MAKE IN INDIA

[www.netproo.com](http://www.netproo.com)

## 4MP IP COLOR CAMERA

### NP-DIP-4MP-GOLD



**Key Feature:**

- 1/2.9" CMOS Image Sensor
- 4 Megapixel Resolution
- Lens 3.6mm Fixed
- Frame Rate 25 fps
- Support: POE
- H.265/H.265+ Dual Stream
- Color Night Vision
- 3DDNR, AGC, AWB,
- BLC Supported

### NP-BIP-4MP-GOLD



**Key Feature:**

- 1/2.9" CMOS Image Sensor
- 4 Mega Pixel Resolution
- Lens 3.6mm Fixed
- Maximum Frame rate 25 fps
- Support: POE
- H.265/H.265+ Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- IP-66 Weather-proof

### NP-DIP-4MP-DARKLIGHT



**Key Feature:**

- Face Detection
- 1/2.7" CMOS Image Sensor
- 4 Megapixel Resolution
- Lens 4mm
- Maximum 25 fps
- Support: POE
- H.265/H.265 Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- Support Audio In-Out
- Dual Light

### NP-BIP-4MP-DARKLIGHT



**Key Feature:**

- Face Detection
- 1/2.7" CMOS Image Sensor
- 4 Megapixel Resolution
- Lens (6mm opt.)
- Maximum 25 fps
- Support: POE
- H.265/H.265 Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- IP-66 Weather-proof
- Support Audio In-Out
- Dual Light

## 5MP IP COLOR CAMERA

### NP-DIP-5MP-GOLD



**Key Feature:**

- 1/2.9" CMOS Image Sensor
- 5 Megapixel Resolution
- Lens 3.6mm Fixed
- Maximum Frame rate 20 fps
- Support: POE
- H.265/H.265+ Dual Stream
- Color Night Vision
- 3DDNR, AGC, AWB,
- BLC Supported

### NP-BIP-5MP-GOLD



**Key Feature:**

- 1/2.9" CMOS Image Sensor
- 5 Megapixel Resolution
- Lens 3.6mm Fixed
- Maximum Frame rate 20 fps
- Support: POE
- H.265/H.265+ Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- IP-66 Weather-proof

### NP-DIP-5MP-DARKLIGHT



**Key Feature:**

- Face Detection
- 1/2.9" SONY Image Sensor
- 5 Megapixel Resolution
- Lens 4mm
- Maximum Frame rate 25 fps
- Support: POE
- H.265/H.265 Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- Support Audio In-Out
- Dual Light

### NP-BIP-5MP-DARKLIGHT



**Key Feature:**

- Face Detection
- 1/2.9" SONY Image Sensor
- 5 Megapixel Resolution
- Lens 4mm (6mm Option.)
- Maximum Frame rate 25 fps
- Support: POE
- H.265/H.265 Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- IP-66 Weather-proof
- Support Audio In-Out
- Dual Light

## 8MP IP COLOR CAMERA

### NP-DIP-8MP-GOLD



**Key Feature:**

- 1/2.8" CMOS Image Sensor
- 8 Megapixel Resolution
- Lens 3.6mm Fixed
- Frame Rate 20 fps
- Support: POE
- H.265/H.265+ Dual Stream
- Color Night Vision
- 3DDNR, AGC, AWB,
- BLC Supported

### NP-BIP-8MP-GOLD



**Key Feature:**

- 1/2.8" CMOS Image Sensor
- 8 Mega Pixel Resolution
- Lens 3.6mm Fixed
- Maximum Frame rate 20 fps
- Support: POE
- H.265/H.265+ Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- IP-66 Weather-proof

### NP-DIP-8MP-DARKLIGHT



**Key Feature:**

- Face Detection
- 1/2.8" SONY Image Sensor
- 8 Megapixel Resolution
- Lens 4mm
- Maximum 25 fps
- Support: POE
- H.265/H.265 Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- Support Audio In-Out
- Dual Light

### NP-BIP-8MP-DARKLIGHT



**Key Feature:**

- Face Detection
- 1/2.8" SONY Image Sensor
- 8 Megapixel Resolution
- Lens 4mm (6mm Optional.)
- Maximum 25 fps
- Support: POE
- H.265/H.265 Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- IP-66 Weather-proof
- Support Audio In-Out
- Dual Light

## 5/8MP IP MOTORIZED CAMERA

**NEW**

NP-IP-5MP-MVF 50MTR IR



**Key Feature:**

- 1/2.8", 5 Mega Pixel CMOS Image Sensor
- Lens (MOTORIZED 2.8mm TO 12MM.)
- Maximum 25 fps
- Support: POE
- H.265/H.265+ Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- IP-65 Weather-proof
- Support Audio Optional
- Dual Light

**NEW**

NP-IP-8MP-MVF 50MTR IR



**Key Feature:**

- 1/2.8", 8 Mega Pixel CMOS Image Sensor
- Lens (MOTORIZED 2.8mm TO 12MM.)
- Maximum 25 fps
- Support: POE
- H.265/H.265+ Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- IP-65 Weather-proof
- Support Audio Optional
- Dual Light

## 4/5MP IP CAMERA (6/8MM) LENS

NP-IP-4MP-6MM / 8MM



**Key Feature:**

- 1/2.7", 4 Mega Pixel CMOS Image Sensor
- Lens 6mm / 8mm
- Maximum 25 fps
- Support: POE
- H.265/H.265+ Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- IP-66 Weather-proof
- Support Audio Optional

NP-IP-5MP-6MM / 8MM



**Key Feature:**

- 1/2.7", 5 Mega Pixel CMOS Image Sensor
- Lens 6mm / 8mm
- Maximum 25 fps
- Support: POE
- H.265/H.265+ Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- IP-66 Weather-proof
- Support Audio Optional

## 4/5MP IP CAMERA (12MM) LENS

NP-IP-4MP-6MM / 8MM



**Key Feature:**

- 1/2.7", 4 Mega Pixel CMOS Image Sensor
- Lens 12mm
- Maximum 25 fps
- Support: POE
- H.265/H.265+ Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- IP-66 Weather-proof
- Support Audio Optional

NP-IP-5MP-6MM / 8MM



**Key Feature:**

- 1/2.7", 5 Mega Pixel CMOS Image Sensor
- Lens 12mm
- Maximum 25 fps
- Support: POE
- H.265/H.265+ Dual Stream.
- Color Night Vision
- 3DDNR, AGC, AWB, BLC Supported
- IP-66 Weather-proof
- Support Audio Optional

## 10/16 CHANNEL NVR

### NP-NVR-8CH-H265-4K

Support access of multiple NetProo smart IP Cameras with human detection and face detection function.



**Key Feature:**

- Support Camera: 1080p , 4mp, 5mp, 8mp
- Communication: LAN+USB
- IP PTZ: Support
- Motion Recording: Yes
- Output: VGA+HDMI
- USB Port: 2 Port
- Backup: USB+LAN
- Protocol: Support ONVIF;access third party;
- Encoding Format: H.265/H.264
- HDD Support: 1 SATA port Upto - 10 TB

### NP-NVR-16CH-H265-4K

Support access of multiple NetProo smart IP Cameras with human detection and face detection function.



**Key Feature:**

- Recording: 25fps
- Support Camera: 1080p , 4mp, 5mp, 8mp
- Communication: LAN+USB
- IP PTZ: Support
- Motion Recording: Yes
- Output: VGA+HDMI
- USB Port:2 Port
- Backup: USB+LAN
- Protocol: Support ONVIF;access third party;
- Encoding Format: H.265/H.264
- HDD Support: 1 SATA port Upto - 10 TB

## 36/64 CHANNEL NVR

### NP-NVR-36CH-H265-4K

Support access of multiple NetProo smart IP Cameras with human detection and face detection function.



**Key Feature:**

- Processor : NT98332
- Video Input : 36CH4K
- Encoding Format:H.265AI/H.265+
- Backup: USB, LAN, SATA
- Protocol: Support ONVIF;access third party;
- Backup : Network ,USB , SATA
- HDD Support: 4 SATA port Upto - 14 TB
- HDMI output: 1\*HDMI (MAX 4K)
- VGA output : 1\*VGA (1080P)

### NP-NVR-64CH-H265-4K

Support access of multiple NetProo smart IP Cameras with human detection and face detection function.



**Key Feature:**

- Processor : NT98336
- Video Input : 64CH4K
- Encoding Format:H.265AI/H.265+
- Backup: USB, LAN, SATA
- Protocol: Support ONVIF;access third party;
- Backup : Network ,USB , SATA
- HDD Support: 8 SATA port Upto - 14 TB
- HDMI output: 2\*HDMI (MAX 4K)
- VGA output : 1\*VGA (1080P)

## IP LONG DISTANCE PTZ CAMERA

### HDC-IP-4MP-PTZ



**Key Feature:**

- 4MP, 36X Zoom
- Zoom Display 36X, Neutral Package
- 6 inch, Half Metal Body Construction, IP66
- IP-PTZ AI Medium speed dome
- IR Sidtance Up to 150 meters
- Wall Mount Bracket, DC12V Power Supply

### HDC-IP-5MP-PTZ



**Key Feature:**

- 5MP, 36X Zoom
- Zoom Display 36X, Neutral Package
- 7 inch, Half Metal Body Construction, IP66
- IP-PTZ AI Medium speed dome
- IR Sidtance Up to 200 meters
- Wall Mount Bracket, DC12V Power Supply

### HDC-IP-6MP-PTZ



**Key Feature:**

- 6MP, 36X Zoom
- Zoom Display 36X, Neutral Package
- 10 inch, Half Metal Body Construction, IP66
- IP-PTZ AI Medium speed dome
- IR Sidtance Up to 150 meters
- Wall Mount Bracket, DC12V Power Supply



## 4/8 CHANNEL DVR

### NP-4CH-5MPDVR-H265

Digital Video Recorder (DVR)  
with Smart Analytics Function



**Key Feature:**

- Operation: Embedded Linux
- Operation System
- Resolution: 4 Ch(5mp)
- Video Compression: H.265
- Video Output: 1-VGA, 1-HDMI
- Coaxial audio : support
- Image Display: 1/4
- Video Speed: 5mp, 22fps
- Supports: CVBS, AHD, IP, CVI, TVI
- Hard Disk Interface: 1 SATA Up to 6TB
- Recording: Manual, Timing, Alarm, Motion Detection
- USB Interface: 2 USB 2.0
- Power: D.C. 12V
- Wi-Fi Support: Yes

### NP-8CH-5MPDVR-H265

Digital Video Recorder (DVR)  
with Smart Analytics Function



**Key Feature:**

- Operation: Embedded Linux
- Operation System
- Resolution: 8Ch(5mp)
- Video Compression: H.265
- Video Output: 1-VGA, 1-HDMI
- Coaxial audio : support
- Image Display: 1/4
- Video Speed: 5mp, 22fps
- Supports: CVBS, AHD, IP, CVI, TVI
- Hard Disk Interface: 1 SATA Up to 6TB
- Recording: Manual, Timing, Alarm, Motion Detection
- USB Interface: 2 USB 2.0
- Power: D.C. 12V
- Wi-Fi Support: Yes

## 16/32 CHANNEL DVR

### NP-16CH-5MPDVR-H265

Digital Video Recorder (DVR)  
with Smart Analytics Function



**Key Feature:**

- Operation: Embedded Linux
- Operation System
- Resolution: 16Ch (5mp)
- Video Compression: H.264
- Video Output: 1-VGA, 1-HDMI
- Coaxial audio : support
- Image Display: 1/4
- Video Speed: 5mp, 22fps
- Supports: CVBS, AHD, IP, CVI, TVI
- Hard Disk Interface: 2 SATA Up to 6TB
- Recording: Manual, Timing, Alarm, Motion Detection
- USB Interface: 2 USB 2.0
- Power: D.C. 12V
- Wi-Fi Support: Yes

### NP-32CH-5MPDVR-H265

Digital Video Recorder (DVR)  
with Smart Analytics Function



**Key Feature:**

- Operation: Embedded Linux
- Operation System
- Resolution: 32Ch (5mp)
- Video Compression: H.264
- Video Output: 1-VGA, 1-HDMI
- Coaxial audio : support
- Image Display: 1/4
- Video Speed: 5mp, 22fps
- Supports: CVBS, AHD, IP, CVI, TVI
- Hard Disk Interface: 4 SATA Up to 6TB
- Recording: Manual, Timing, Alarm, Motion Detection
- USB Interface: 2 USB 2.0
- Power: D.C. 12V
- Wi-Fi Support: Yes

## HD 2.4 IR DOME & BULLET CAMERA

### NP-IR-2.4-D



**2.4MP DOME**

- 1/2.9", 2.4 Mega Pixel CMOS Sensor
- Resolution: 1920(H) x 1080(V)
- Lens: 3.6mm (Fixed)
- UTC 4-in-1 - AHD/TVI/CVI/CVBS
- Up to 20m IR Distance
- Multiple Angle Adjustable

### NP-IR-2.4-T



**2.4MP BULLET**

- 1/2.9", 2.4 Mega Pixel CMOS Sensor
- Resolution: 1920(H) x 1080(V)
- Lens: 3.6/6mm (Fixed)
- UTC 4-in-1 - AHD/TVI/CVI/CVBS
- Up to 20m IR Distance
- Multiple Angle Adjustable

### NP-IR-5MP-D



**5MP DOME**

- 1/3", 5.0 Mega Pixel CMOS Sensor
- Lens: 3.6mm (Fixed)
- Resolution: 2592(H) x 1920(V)
- Up to 20m IR Distance
- Multiple Angle Adjustable
- UTC 4-in-1 - AHD/TVI/CVI/CVBS

### NP-IR-5MP-T



**5MP BULLET**

- 1/3", 5.0 Mega Pixel CMOS Sensor
- Lens: 3.6mm/6mm (Fixed)
- Resolution: 2592(H) x 1920(V)
- Up to 20m IR Distance
- Multiple Angle Adjustable
- UTC 4-in-1 - AHD/TVI/CVI/CVBS

## 2.4MP HD COLOR CAMERA

2.4MP NP-AHD-CV-2.4-D



**Key Feature:**

- 1/2.9", 2.4 Mega Pixel CMOS Sensor
- Resolution: 1920(H) x 1080(V)
- Lens: 3.6mm (Fixed)
- UTC 4-in-1 - AHD/TVI/CVI/CVBS
- Up to 20m IR Distance
- Multiple Angle Adjustable

2.4MP NP-AHD-CV-2.4-T



**Key Feature:**

- 1/2.9", 2.4 Mega Pixel CMOS Sensor
- Resolution: 1920(H) x 1080(V)
- Lens: 3.6/6mm (Fixed)
- UTC 4-in-1 - AHD/TVI/CVI/CVBS
- Up to 20m IR Distance
- Multiple Angle Adjustable

2.4MP NP-AHD-CV-2.4-DA



**Key Feature:**

- 1/2.9", 5.0 Mega Pixel CMOS Sensor
- Lens: 3.6mm (Fixed)
- Resolution: 2592(H) x 1920(V)
- Up to 20m IR Distance
- Multiple Angle Adjustable
- UTC 4-in-1 - AHD/TVI/CVI/CVBS

2.4MP NP-AHD-CV-2.4-TA



**Key Feature:**

- 1/3", 5.0 Mega Pixel CMOS Sensor
- Lens: 3.6mm/6mm (Fixed)
- Resolution: 2592(H) x 1920(V)
- Up to 20m IR Distance
- Multiple Angle Adjustable
- UTC 4-in-1 - AHD/TVI/CVI/CVBS

## 5MP HD COLOR CAMERA

5 MP NP-AHD-CV-05-D



**Key Feature:**

- STARLIGHT 1/2.9", 5 Mega Pixel CMOS Sensor
- Resolution: 2560(H) x 1920(V)
- Lens: 3.6mm (Fixed)
- UTC 4-in-1 - AHD/TVI/CVI/CVBS
- Min. Illumination: 0.01 Lux/F1.2
- Multiple Angle Adjustable

5 MP NP-AHD-CV-05-T



**Key Feature:**

- STARLIGHT 1/2.9", 5 Mega Pixel CMOS Sensor
- Resolution: 2560(H) x 1920(V)
- Lens: 3.6mm (Fixed)
- UTC 4-in-1 - AHD/TVI/CVI/CVBS
- Min. Illumination: 0.01 Lux/F1.2
- Multiple Angle Adjustable

5 MP NP-AHD-CV-05-DA



**Key Feature:**

- STARLIGHT 1/2.9", 5 Mega Pixel CMOS Sensor
- Resolution: 2560(H) x 1920(V)
- Lens: 3.6mm (Fixed)
- UTC 4-in-1 - AHD/TVI/CVI/CVBS
- Min. Illumination: 0.01 Lux/F1.2
- Multiple Angle Adjustable
- With Inbuilt Audio Mic

5 MP NP-AHD-CV-05-TA



**Key Feature:**

- STARLIGHT 1/2.9", 5 Mega Pixel CMOS Sensor
- Resolution: 2560(H) x 1920(V)
- Lens: 3.6mm (Fixed)
- UTC 4-in-1 - AHD/TVI/CVI/CVBS
- Min. Illumination: 0.01 Lux/F1.2
- Multiple Angle Adjustable
- With Inbuilt Audio Mic

## CABLES

INDOOR CAT6 CABLE



**Key Feature:**

- 4 Pair
- 24 AWG
- Weather Proof Single Jacket
- Solid 100% Copper
- Colors: Green , Red, Grey, Yellow

OUTDOOR CAT CABLE



**Key Feature:**

- 4 Pair
- 24 AWG
- Weather Proof Double Coated
- Solid 100% Copper
- Colors: Green , Red, Grey, Yellow

3+1 CABLE



**Key Feature:**

- No of Core: Three, Insulation: PVC
- Length: 22 Gauge
- Video Core insulation: HDPE
- Color Video Code: Natural
- Color of Jacket: Black
- Color Jacketing : White
- Shielded: AL-Mylar
- Sequential marking: Every Meter

4+1 CABLE



**Key Feature:**

- No of Core: Four, Insulation: PVC
- Length: 22 Gauge
- Video Core insulation: HDPE
- Color Video Code: Natural
- Color of Jacket: Black
- Color Jacketing : White
- Shielded: AL-Mylar
- Sequential marking: Every Meter

## SMPS POWER SUPPLY

NP-PS04-SINGLE



NP-PS04-SINGLE



NP-PS04-SINGLE



NP-PS04-MULTI



NP-PS08-MULTI



NP-PS16-MULTI



### Key Feature:

- Input Voltage : AC 110-285V
- Input Frequency : 50Hz
- Output Voltage : DC 12V- DC 15V
- Output power On : >85%
- Line Regulation : <1%
- Input Cord : 2 Pin
- Input Current : 200 mA @230V
- Output current : 4800 mA Max.

### Key Feature:

- Input Voltage : AC 110-285V
- Input Frequency : 50Hz
- Output Voltage : DC 12V- DC 15V
- Output power On : >85%
- Line Regulation : <1%
- Input Cord : 2 Pin
- Input Current : 290 mA @230V
- Output current : 7200 mA Max

### Key Feature:

- Input Voltage : AC 110-285V
- Input Frequency : 50Hz
- Output Voltage : DC 12V- DC 15V
- Output power On : >85%
- Line Regulation : <1%
- Input Cord : 2 Pin
- Input Current : 590 mA @230V
- Output current : 9600 mA Max.

### Key Feature:

- Input Voltage : AC 110-285V
- Input Frequency : 50Hz
- Output Voltage : DC 12V- DC 15V
- Output power On : >85%
- Line Regulation : <1%
- Input Cord : 2 Pin
- Input Current : 200 mA @230V
- Output current : 4800 mA Max.

### Key Feature:

- Input Voltage : AC 110-285V
- Input Frequency : 50Hz
- Output Voltage : DC 12V- DC 15V
- Output power On : >85%
- Line Regulation : <1%
- Input Cord : 2 Pin
- Input Current : 290 mA @230V
- Output current : 7200 mA Max

### Key Feature:

- Input Voltage : AC 110-285V
- Input Frequency : 50Hz
- Output Voltage : DC 12V- DC 15V
- Output power On : >85%
- Line Regulation : <1%
- Input Cord : 2 Pin
- Input Current : 590 mA @230V
- Output current : 9600 mA Max.

## NETWORK POE SWITCH

### UPLINK POE SWITCH (10/100/1000)MBPS

4-PORT

NP-POE-42N



**SPEED**  
10/100MBPS

- PoE Ethernet 4\*Port: 10/100Mbps
- Ethernet Uplink 2\*Port: 100Mbps
- Consumption: 75W(52V 1.44A)
- Power Adapter Voltage: AC 110V-240V
- Transmission Distance: 250Mtr.
- Switching Capacity: 1.2Gbps
- Throughput: 0.9Mbps
- PoE Standard: IEEE802.3af/at
- Color & Weight: Black & 0.95Kg

8-PORT

NP-POE-82N



**SPEED**  
10/100MBPS

- PoE Ethernet 8\*Port: 10/100Mbps
- Ethernet Uplink 2\*Port: 100Mbps
- Consumption: 120W(52V 2.3A)
- Power Adapter Voltage: AC 110V-240V
- Transmission Distance: 250Mtr.
- Switching Capacity: 2Gbps
- Throughput: 1.488Mbps
- PoE Standard: IEEE802.3af/at
- Color & Weight: Black & 0.95Kg

8-PORT

NP-POE-82NGS



**SPEED**  
10/100/1000MBPS

- PoE Ethernet 8\*Port: 10/100Mbps
- Ethernet Uplink 2\*Port: 100Mbps
- Consumption: 120W(52V 2.3A)
- Power Adapter Voltage: AC 110V-240V
- Transmission Distance: 250Mtr.
- Switching Capacity: 5.6Gbps
- Throughput: 4.1664Mbps
- PoE Standard: IEEE802.3af/at
- Color & Weight: Black & 1.05Kg

16-PORT

NP-POE-1621GS



**SPEED**  
10/100/1000MBPS

- PoE Ethernet 16\*Port: 10/100Mbps
- Uplink + SFP 2+1\*Port: 1000Mbps
- Consumption: 250W(52V 4.8A)
- Power Adapter Voltage: AC 110V-240V
- Transmission Distance: 250Mtr.
- Switching Capacity: 7.6Gbps
- Throughput: 5.6544Mbps
- PoE Standard: IEEE802.3af/at
- Color & Weight: Black & 4.2Kg

24-PORT

NP-POE-24N2G2S



**SPEED**  
10/100/1000MBPS

- PoE Ethernet 24\*Port: 10/100Mbps
- Uplink & SFP 2+2\*Port: 1000Mbps
- Consumption: 300W(52V, 5.76A)
- Power Adapter Voltage: AC 110V-240V
- Transmission Distance: 100Mtr.
- Switching Capacity: 12.8Gbps
- Throughput: 9.5232Mbps
- PoE Standard: IEEE802.3af/at
- Color & Weight: Black & 5.2Kg

### FULL GIGA POE SWITCH (1000)MBPS

4-PORT

NP-POE-41FGS



**SPEED**  
1000MBPS

- PoE Ethernet 4\*Port: 1000Mbps
- Uplink & SFP Port 1+1: 1000Mbps
- Consumption: 120W(52V 2.3A)
- Power Adapter Voltage: AC 110V-240V
- Transmission Distance: 100Mtr.
- Switching Capacity: 12Gbps
- Throughput: 8.928Mbps
- PoE Standard: IEEE802.3af/at
- Color & Weight: Black & 1.05Kg

8-PORT

NP-POE-82FGS



**SPEED**  
1000MBPS

- PoE Ethernet 8\*Port: 1000Mbps
- Uplink & SFP 2+2\*Port: 1000Mbps
- Consumption: 150W(52V 2.88A)
- Power Adapter Voltage: AC 110V-240V
- Transmission Distance: 100Mtr.
- Switching Capacity: 20Gbps
- Throughput: 14.88Mbps
- PoE Standard: IEEE802.3af/at
- Color & Weight: Black & 2.5Kg

### FULL GIGA POE SWITCH (1000)MBPS

16-PORT

NP-POE-162G1SF



**SPEED**  
1000MBPS

- PoE Ethernet 16\*Port: 1000Mbps
- Uplink + SFP 2+1\*Port: 1000Mbps
- Consumption: 300W(52V 5.76A)
- Power Adapter Voltage: AC 110V-240V
- Transmission Distance: 250Mtr.
- Switching Capacity: 38Gbps
- Throughput: 29.41Mbps
- PoE Standard: IEEE802.3af/at
- Color & Weight: Black & 4.2Kg

24-PORT

NP-POE-24G1G2GSF




**SPEED**  
1000MBPS

- PoE Ethernet 24\*Port: 1000Mbps
- Uplink & SFP 2+2\*Port: 1000Mbps
- Consumption: 300W(52V, 5.76A)
- Power Adapter Voltage: AC 110V-240V
- Transmission Distance: 100Mtr.
- Switching Capacity: 56Gbps
- Throughput: 43.34Mbps
- PoE Standard: IEEE802.3af/at
- Color & Weight: Black & 5.68Kg

# NNETPROO<sup>®</sup>

BE ALERT, BE SAFE...



## MAKE IN INDIA



[www.netproo.com](http://www.netproo.com)



CE FC RoHS COMPLIANT ISO